
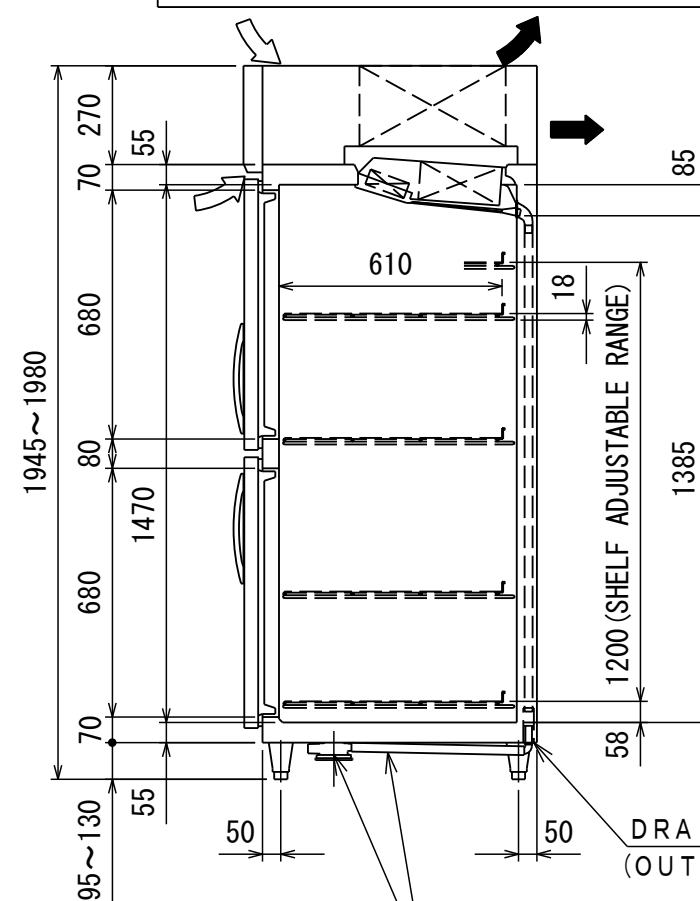
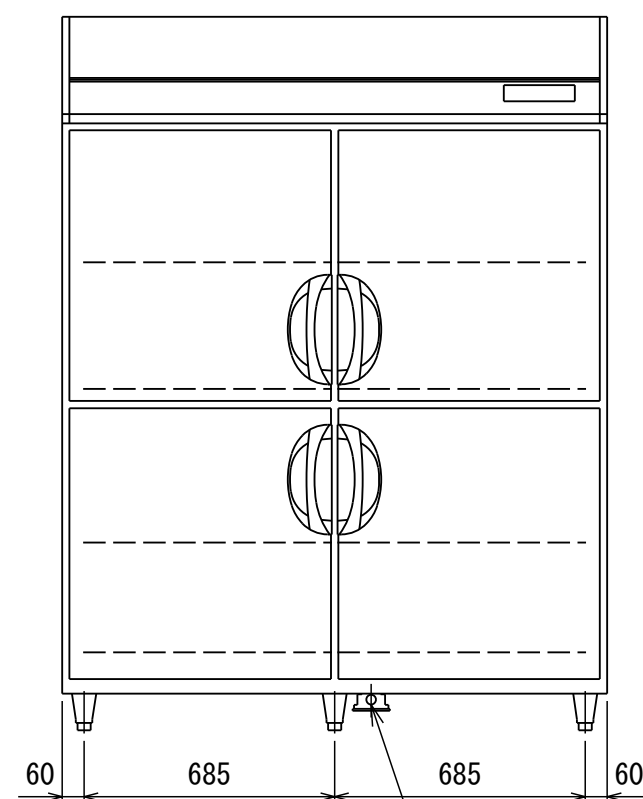
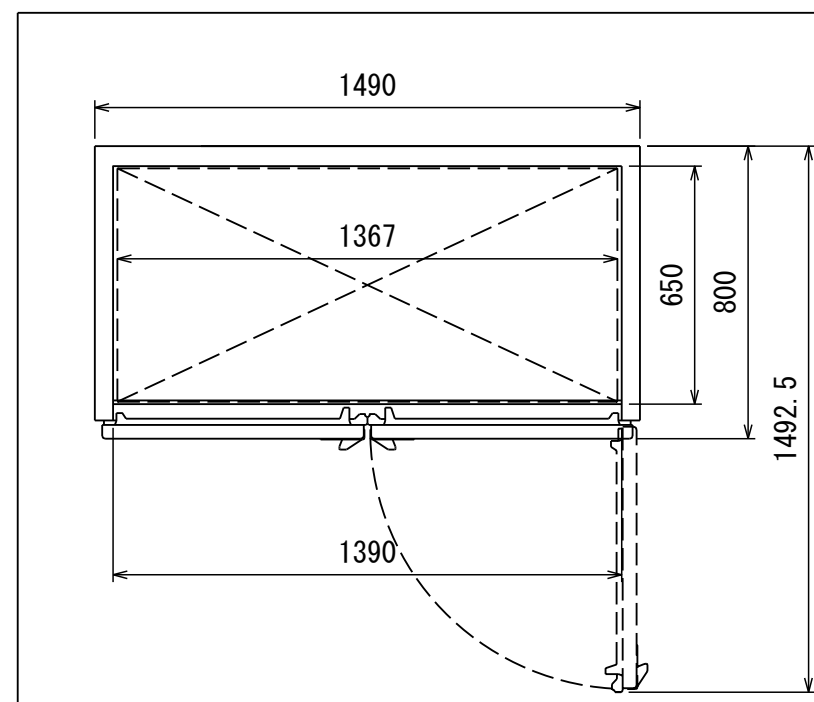


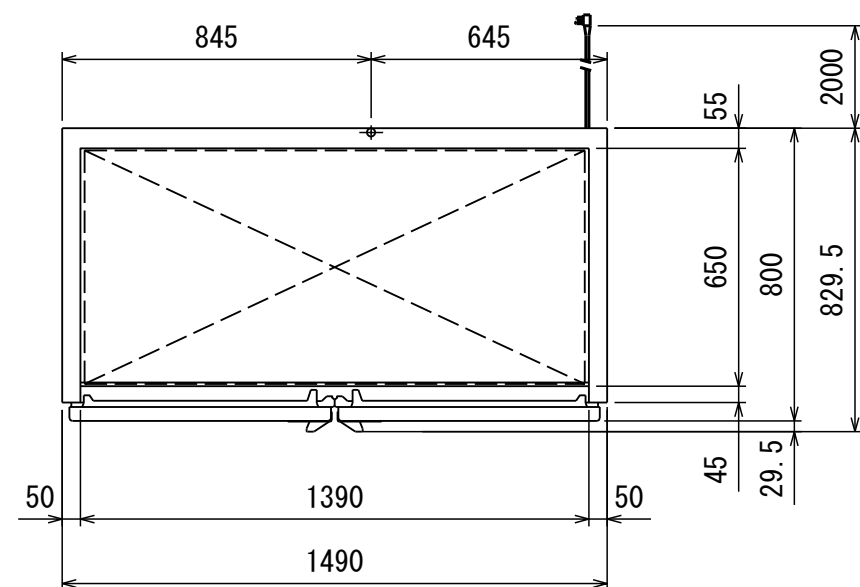

DRAIN HOSE 2000mm
(OUTSIDE DIAMETER $\phi 25$)

DRAIN
(OUTSIDE DIAMETER $\phi 22$)

DRAIN ACCESSORIES

$$\geq 3. \quad 3 \text{ m}^2$$

MINIMUM ROOM FLOOR AREA


This product is using mildly flammable refrigerant (A2L). For safety, please make sure to provide the required area to place the product.

PRODUCT NAME	Commercial Freezer (Upright Type)	
MODEL	ARD-154FXFA-TH	
POWER SUPPLY	Single Phase 220V 50Hz	
OUTSIDE DIMENSIONS	(W) 1490mm× (D) 800mm× (H) 1950mm	
INSIDE DIMENSIONS	(W) 1390mm× (D) 650mm× (H) 1470mm	
EFFECTIVE CAPACITY	1373L	
WEIGHT	165kg	
EXTERIOR MATERIAL	Stainless Steel (Front and Sides) Stainless Steel (Top) Galvanized Steel (Rear and Bottom)	
INTERIOR MATERIAL	Stainless Steel	
DOOR MATERIAL	Stainless Steel (Front)	
INSULATION MATERIAL	Polyurethane Foam	
ADJUSTABLE SHELF MATERIAL	Steel Wire Resin coating	
COOLING PERFORMANCE	-25℃ to -15℃ (No Load and Ambient Temperature of 30℃)	
COMPRESSOR	Inverter 180W, Fixed 250W	
REFRIGERANT CONTROL METHOD	Capillary Tube	
CONDENSER	Microchannel Type, Forced Air-Cooling	
EVAPORATOR	Fin and Tube Type, Forced Cold Air Circulation	
REFRIGERANT	Inverter R1234yf, Fixed R1234yf	
TEMPERATURE CONTROL	Microcomputer Control, Digital Display	
DEFROST CONTROL	Microcomputer Control Defrost Heater	
APPLICABLE BREAKER CAPACITY	Single Phase 220V 15A 50Hz	
POWER CORD	2. 0m (Plug with Earth Wire)	
VOLTAGE RANGE	220V±6%	
COOLING	Operation Current	2. 6A
	Power Consumption	500W
	Power Factor	87%
DEFROSTING	Operation Current	2. 5A
	Power Consumption	530W
OPERATING TEMPERATURE RANGE	5℃ to 35℃	
RADIATION OF HEAT CAPACITY	725W	
ADJUSTABLE LEG	Resin made Leg from 95 to 130mm	
ACCESSORIES	Shelves (4 Pieces) Drain Accessory (1 Set)	
OTHER ACCESSORIES	Condenser Filter	

We may change it without a notice for improvement about the specifications and design.

 SUCTION AIR
 EXHAUST AIR

PLUG TYPE



		REFERENCE NO
DATA 28 · 2 · 2025	SCALE 1/20	DRAWING NO
GALILEI (THAILAND) CO., LTD		