

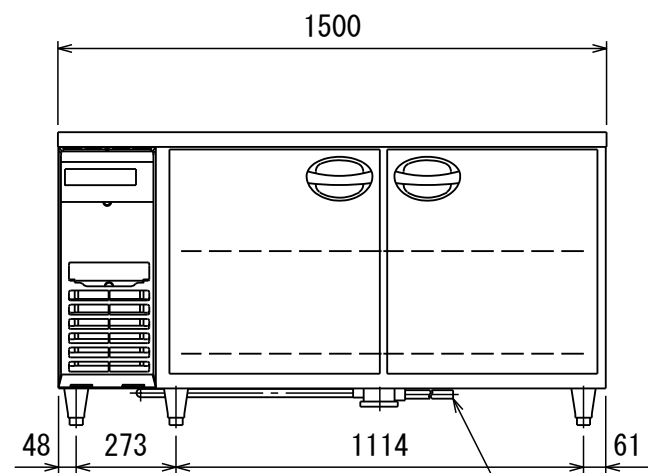
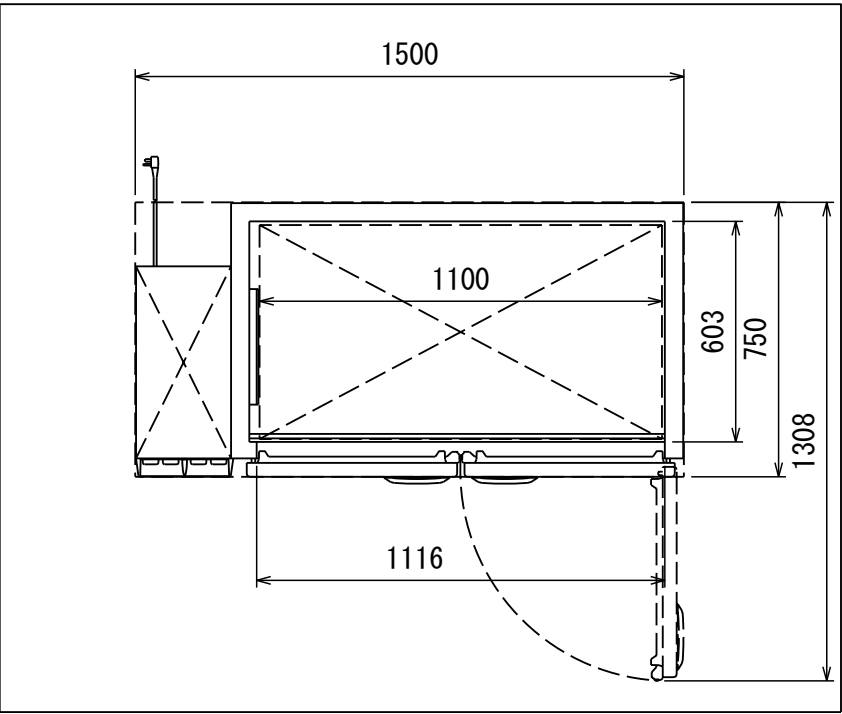
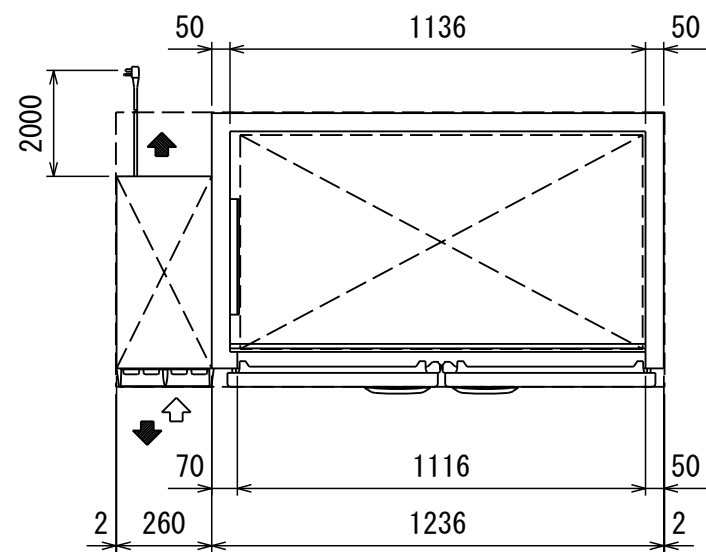




DRAIN HOSE 2000mm
(INSIDE DIAMETER ϕ 25)

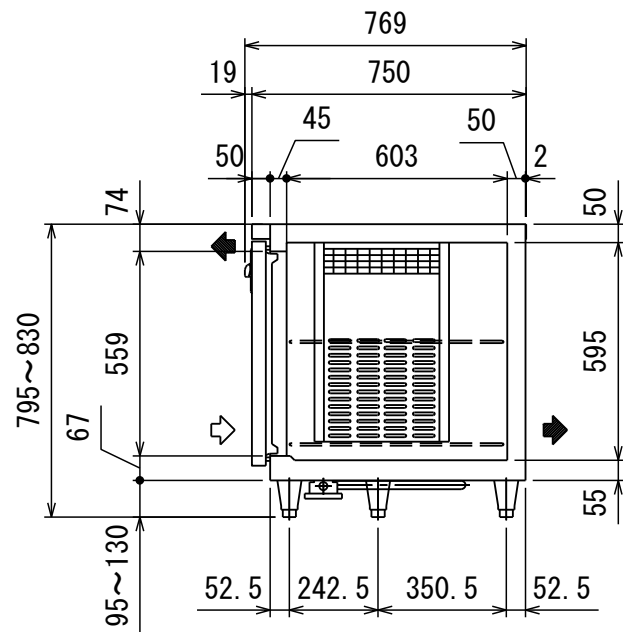


MINIMUM ROOM FLOOR AREA
This product is using mildly flammable refrigerant (A2L).
For safety, please make sure to provide the required area to place the product.

PRODUCT NAME	Commercial Refrigerator (Table Type)		
MODEL	AYW-150RXFA-TH		
POWER SUPPLY	Single Phase 220V 50Hz		
OUTSIDE DIMENSIONS	(W) 1500mm× (D) 750mm× (H) 800mm		
INSIDE DIMENSIONS	(W) 1136mm× (D) 603mm× (H) 595mm		
EFFECTIVE CAPACITY	428L		
WEIGHT	100kg		
EXTERIOR MATERIAL	Stainless Steel (Front and Sides)		
	Stainless Steel (Top)		
	Galvanized Steel (Rear and Bottom)		
INTERIOR MATERIAL	Stainless Steel		
DOOR MATERIAL	Stainless Steel (Front)		
INSULATION MATERIAL	Polyurethane Foam		
ADJUSTABLE SHELF MATERIAL	Steel Wire Resin coating		
COOLING PERFORMANCE	-5℃ to 10℃ (No Load and Ambient Temperature of 30℃)		
COMPRESSOR	140W		
REFRIGERANT CONTROL METHOD	Capillary Tube		
CONDENSER	Microchannel Type, Forced Air-Cooling		
EVAPORATOR	Fin and Tube Type, Forced Cold Air Circulation		
REFRIGERANT	R1234yf		
TEMPERATURE CONTROL	Microcomputer Control, Digital Display		
DEFROST CONTROL	Microcomputer Control Defrost Heater		
APPLICABLE BREAKER CAPACITY	Single Phase 220V 15A 50Hz		
POWER CORD	2.0m (Plug with Earth Wire)		
VOLTAGE RANGE	220V±6%		
COOLING	Operation Current	1.1A	
	Power Consumption	205W	
	Power Factor	85%	
DEFROSTING	Operation Current	1.1A	
	Power Consumption	242W	
OPERATING TEMPERATURE RANGE	5℃ to 35℃		
RADIATION OF HEAT CAPACITY	565W		
ADJUSTABLE LEG	Resin made Leg from 95 to 130mm		
ACCESSORIES	Shelves (2 Pieces)		
	Drain Accessory (1 Set)		
OTHER ACCESSORIES	Condenser Filter		

We may change it without a notice for improvement about the specifications and design.

➡ SUCTION AIR
➡ EXHAUST AIR

PLUG TYPE



		REFERENCE NO
DATA 28 · 2 · 2025	SCALE 1/20	DRAWING NO
GALILEI (THAILAND) CO., LTD		