

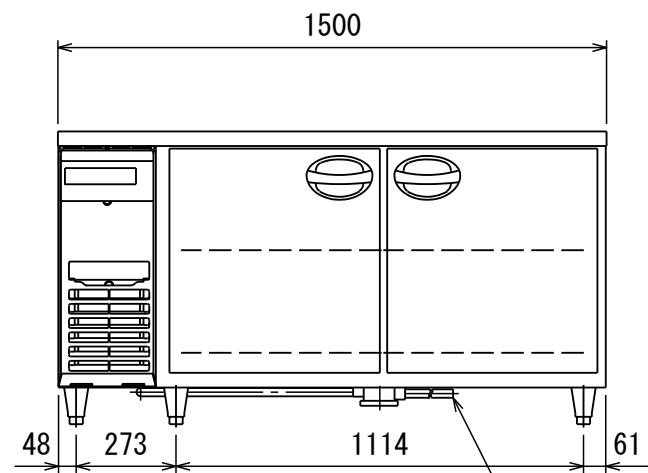
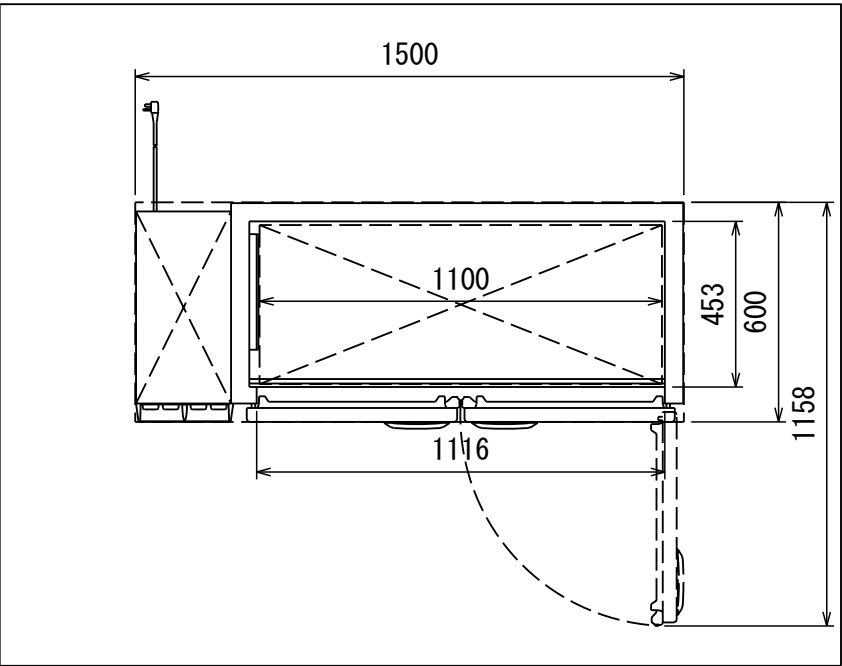
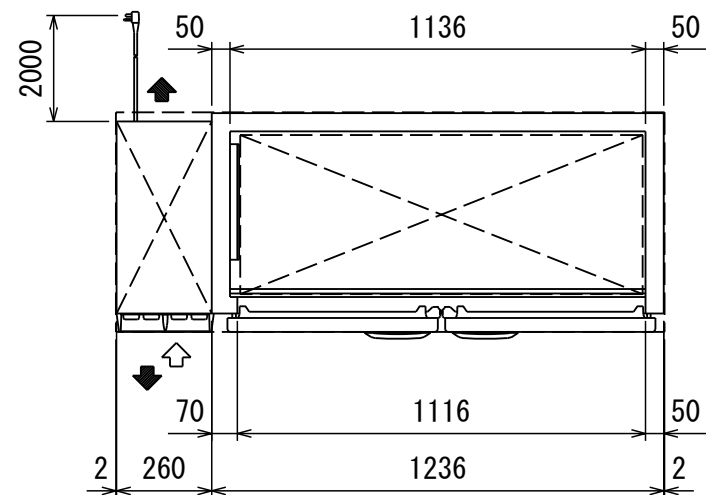




DRAIN HOSE 2000mm  
(INSIDE DIAMETER  $\phi$  25)

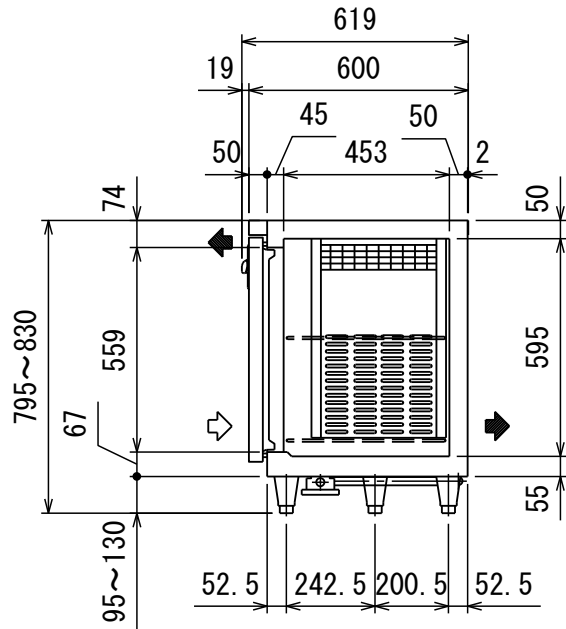


MINIMUM ROOM FLOOR AREA  
This product is using mildly flammable refrigerant (A2L).  
For safety, please make sure to provide the required area to place the product.

|                             |                                                                                                  |      |
|-----------------------------|--------------------------------------------------------------------------------------------------|------|
| PRODUCT NAME                | Commercial Freezer (Table Type)                                                                  |      |
| MODEL                       | AYC-152FXFA-TH                                                                                   |      |
| POWER SUPPLY                | Single Phase 220V 50Hz                                                                           |      |
| OUTSIDE DIMENSIONS          | (W) 1500mm× (D) 600mm× (H) 800mm                                                                 |      |
| INSIDE DIMENSIONS           | (W) 1136mm× (D) 453mm× (H) 595mm                                                                 |      |
| EFFECTIVE CAPACITY          | 326L                                                                                             |      |
| WEIGHT                      | 90kg                                                                                             |      |
| EXTERIOR MATERIAL           | Stainless Steel (Front and Sides)<br>Stainless Steel (Top)<br>Galvanized Steel (Rear and Bottom) |      |
| INTERIOR MATERIAL           | Stainless Steel                                                                                  |      |
| DOOR MATERIAL               | Stainless Steel (Front)                                                                          |      |
| INSULATION MATERIAL         | Polyurethane Foam                                                                                |      |
| ADJUSTABLE SHELF MATERIAL   | Steel Wire Resin coating                                                                         |      |
| COOLING PERFORMANCE         | -25℃ to -15℃<br>(No Load and Ambient Temperature of 30℃)                                         |      |
| COMPRESSOR                  | 180W                                                                                             |      |
| REFRIGERANT CONTROL METHOD  | Capillary Tube                                                                                   |      |
| CONDENSER                   | Microchannel Type, Forced Air-Cooling                                                            |      |
| EVAPORATOR                  | Fin and Tube Type, Forced Cold Air Circulation                                                   |      |
| REFRIGERANT                 | R1234yf                                                                                          |      |
| TEMPERATURE CONTROL         | Microcomputer Control, Digital Display                                                           |      |
| DEFROST CONTROL             | Microcomputer Control Defrost Heater                                                             |      |
| APPLICABLE BREAKER CAPACITY | Single Phase 220V 15A 50Hz                                                                       |      |
| POWER CORD                  | 2.0m (Plug with Earth Wire)                                                                      |      |
| VOLTAGE RANGE               | 220V±6%                                                                                          |      |
| COOLING                     | Operation Current                                                                                | 1.3A |
|                             | Power Consumption                                                                                | 220W |
|                             | Power Factor                                                                                     | 77%  |
| DEFROSTING                  | Operation Current                                                                                | 1.1A |
|                             | Power Consumption                                                                                | 242W |
| OPERATING TEMPERATURE RANGE | 5℃ to 35℃                                                                                        |      |
| RADIATION OF HEAT CAPACITY  | 310W                                                                                             |      |
| ADJUSTABLE LEG              | Resin made Leg from 95 to 130mm                                                                  |      |
| ACCESSORIES                 | Shelves (2 Pieces)                                                                               |      |
|                             | Drain Accessory (1 Set)                                                                          |      |
| OTHER ACCESSORIES           | Condenser Filter                                                                                 |      |

We may change it without a notice for improvement about the specifications and design.

↗ SUCTION AIR  
➡ EXHAUST AIR

PLUG TYPE



|                             |               |              |
|-----------------------------|---------------|--------------|
|                             |               | REFERENCE NO |
| DATA<br>28 · 2 · 2025       | SCALE<br>1/20 | DRAWING NO   |
| GALILEI (THAILAND) CO., LTD |               |              |