


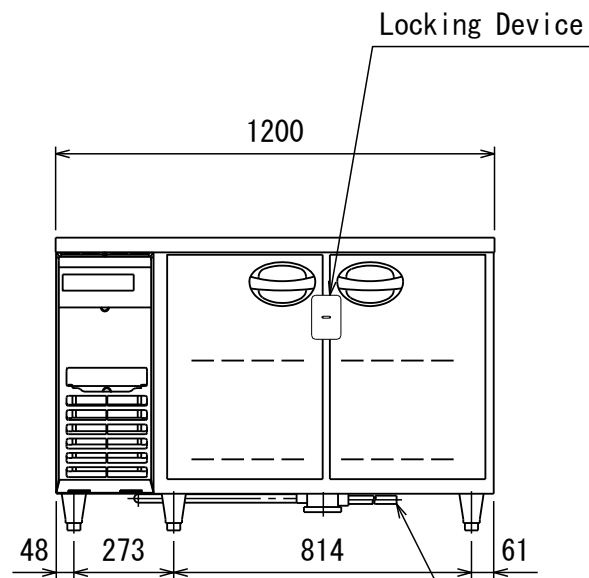
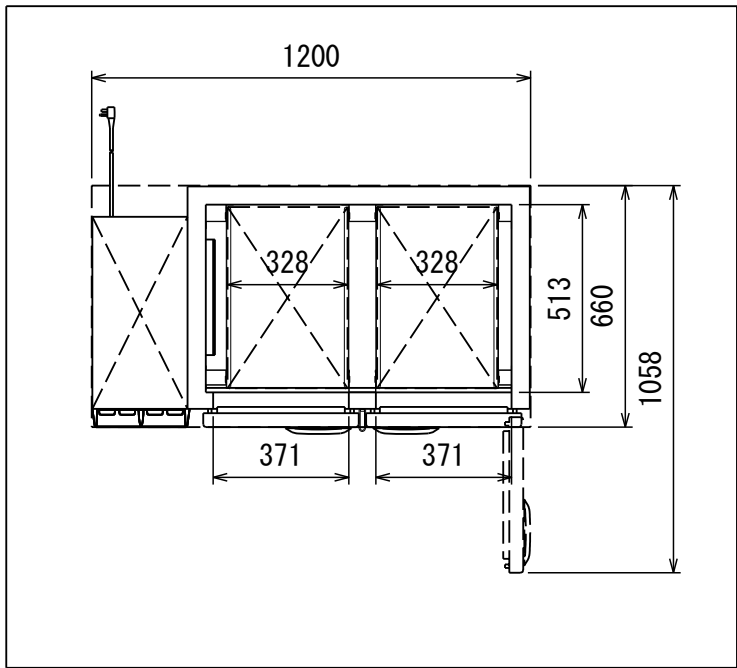


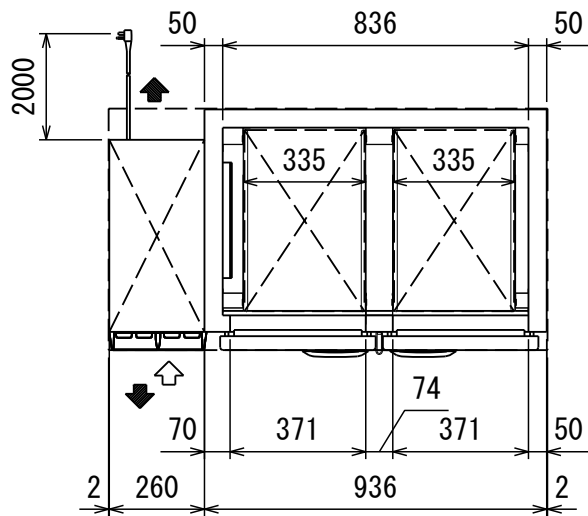

DRAIN HOSE 2000mm
(INSIDE DIAMETER ϕ 25)

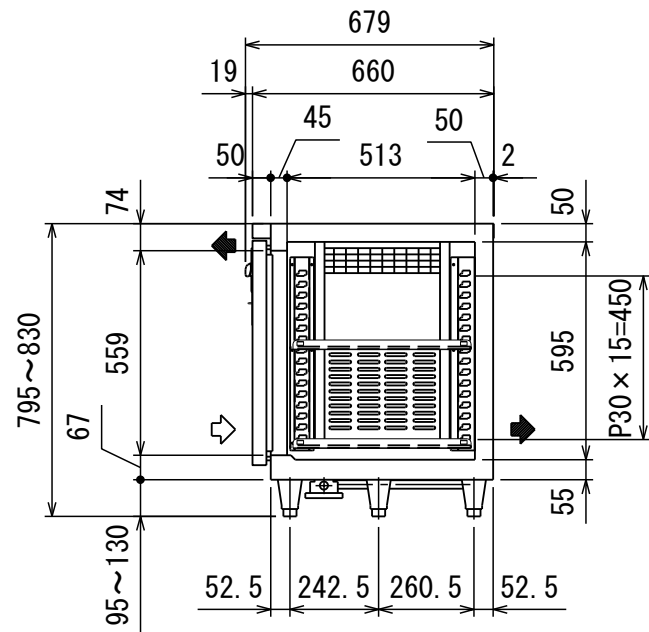

Accommodate 1/1 GN size




PRODUCT NAME	Commercial Refrigerator (Table Type)	
MODEL	AYN-120RXPA-TH	
POWER SUPPLY	Single Phase 220V 50Hz	
OUTSIDE DIMENSIONS	(W) 1200mm× (D) 660mm× (H) 800mm	
INSIDE DIMENSIONS	(W) 836mm× (D) 513mm× (H) 595mm	
EFFECTIVE CAPACITY	271L	
WEIGHT	80kg	
EXTERIOR MATERIAL	Stainless Steel (Front and Sides) Stainless Steel (Top) Galvanized Steel (Rear and Bottom)	
INTERIOR MATERIAL	Stainless Steel	
DOOR MATERIAL	Stainless Steel (Front) Stainless Steel (Rear)	
INSULATION MATERIAL	Polyurethane Foam	
ADJUSTABLE SHELF MATERIAL	Steel Wire Resin coating	
COOLING PERFORMANCE	-5℃ to 10℃ (No Load and Ambient Temperature of 30℃)	
COMPRESSOR	140W	
REFRIGERANT CONTROL METHOD	Capillary Tube	
CONDENSER	Microchannel Type, Forced Air-Cooling	
EVAPORATOR	Fin and Tube Type, Forced Cold Air Circulation	
REFRIGERANT	R1234yf	
TEMPERATURE CONTROL	Microcomputer Control, Digital Display	
DEFROST CONTROL	Microcomputer Control Defrost Heater	
APPLICABLE BREAKER CAPACITY	Single Phase 220V 15A 50Hz	
POWER CORD	2.0m (Plug with Earth Wire)	
VOLTAGE RANGE	220V±6%	
COOLING	Operation Current	1.0A
	Power Consumption	180W
	Power Factor	82%
DEFROSTING	Operation Current	1.1A
	Power Consumption	231W
OPERATING TEMPERATURE RANGE	5℃ to 35℃	
RADIATION OF HEAT CAPACITY	565W	
ADJUSTABLE LEG	Resin made Leg from 95 to 130mm	
ACCESSORIES	Shelves (4 Pieces)	
	Pan Brackets (4 Sets)	
	Locking Device (1 Set)	
	Drain Accessory (1 Set)	
OTHER ACCESSORIES	Condenser Filter	

We may change it without a notice for improvement about the specifications and design.

⇨ SUCTION AIR
⇩ EXHAUST AIR

PLUG TYPE



≥ 3.3m²

MINIMUM ROOM FLOOR AREA

This product is using mildly flammable refrigerant (A2L). For safety, please make sure to provide the required area to place the product.

		REFERENCE NO
DATA 28 · 2 · 2025	SCALE 1/20	DRAWING NO
GALILEI (THAILAND) CO., LTD		