



GALILEI

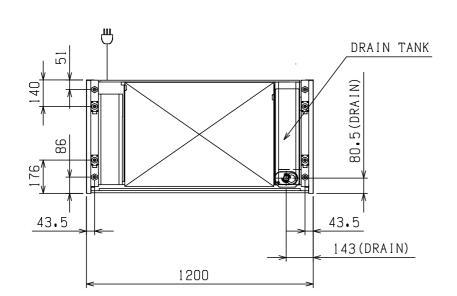



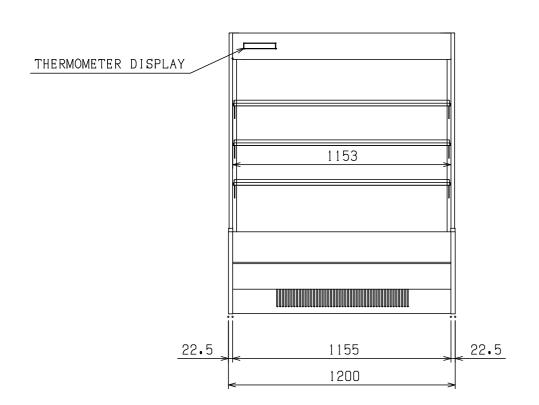

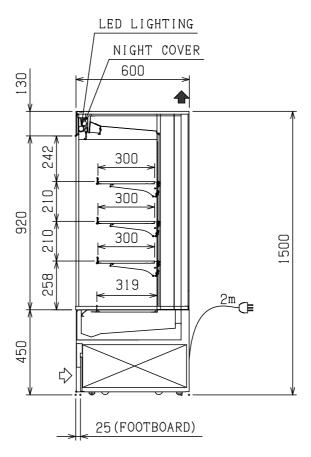

PRODUCT NAME	Commercial R	efrigerator Showcase	
MODEL	MEU-4AGHJT3L-TH		
POWER SUPPLY	Single Phase 220V 50Hz		
OUTSIDE DIMENSIONS	(W) 1200mmX (D) 600mmX (H) 1500mm		
INSIDE DIMENSIONS	(W) 1155mmX(D) 319mmX(H) 920mm		
EFFECTIVE CAPACITY	353L		
SHELF	Steel Plate Shelf(Variable () ° or 8°)		
DISPLAY AREA	1.40 m <sup>2</sup>		
WEIGHT	200kg		
EXTERIOR MATERIAL	Color Steel, Painted Steel		
	Resin Molded Product		
INTERIOR MATERIAL	Color Steel, Painted Steel		
INSULATION MATERIAL	Polyurethane Foam		
	Temperature	27℃ OR LESS	
AMBIENT AIR CONDITION	Humidity	70% OR LESS	
	Wind Speed	O.2m/s OR LESS	
COOLING PERFORMANCE	3℃ to 20℃ (No Load and Within Ambient Air Condition)		
COMPRESSOR	1250W(DC Inverter)		
REFRIGERANT CONTROL METHOD	Electronic Expansion Valve		
CONDENSER	Fin and Tube Type, Forced Air-Cooling		
EVAPORATOR	Fin and Tube Type, Forced Cold Air Circulation		
REFRIGERANT	R-404A		
TEMPERATURE CONTROL	Microcomputer Control, Digital Display		
DEFROST CONTROL	Microcomputer Control Offcycle Defrost		
APPLICABLE BREAKER CAPACITY	Single Phase 220V 15A 50Hz		
POWER CORD	2.Om(Plug with Earth Wire)		
VOLTAGE RANGE	220V±6%		
COOLING	Operation Current	4.5A	
	Maximum Current	7.5A	
	Power Consumption	950W	
	Power Factor	96%	
THE E DITCH I KILL	Operation Current		
	Power Consumption	76W	
RADIATION OF HEAT CAPACITY	4840W		
		(Standard Equipment)	
	Alarıı buzzer	(Didinadia Equipment)	
	Night Cove		
	Night Cover Caster		
ACCESSORIES	Night Cove		

- SUCTION AIR
- EXHAUST AIR

0 0

PLUG TYPE

		REFERENCE NO	
DATA 05 · 04 · 2021	SCALE 1 20	DRAWING NO	
GALILEI (THAILAND) CO., LTD.			

- 1. Ambient temperature: 27°C, humidity: 70%, wind speed: 0.2 m/s or less
- Discard the water in the drain tank once a day.
- If the above installation conditions are exceeded, discard the water in the drain tank before the drain tank overflows.
- 2. The back sideunit will have a higher ambient temperature due to exhaust heat.
- Please be careful about the display of surrounding products
- 3. We may change it without a notice for improvement about the specifications and design.